


SPB-2000, SPB-7000

Tailstock for one-station positioner HSB.

- Rigid design.
- Optional rail track.

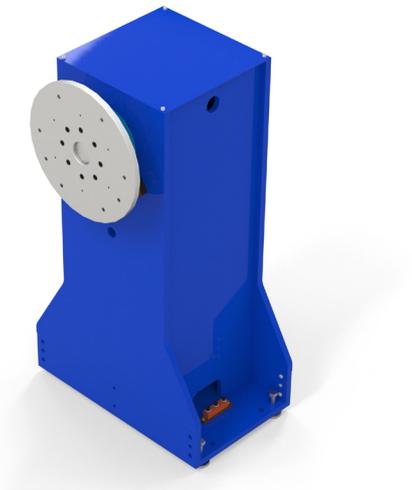

This is a tailstock for floor mounting at an appropriate distance from the positioner.

The optional rail track makes it possible to move the tailstock by hand and fasten it anywhere along the track. The rail track can be made up to fifteen meters in total.




Accessories

- Shaft locking device
- Signal transfer unit
- Rail track

Technical data		SPB-2000	SPB-7000
Maximum fixture width, radius = R		970, 1200, 1500 mm	1200, 1500, 1830 mm
Welding capacity	100% duty cycle 60% duty cycle	2x 350 A 2x 460 A	2x 350 A 2x 460 A
Option: shaft locking device		No	Yes ¹⁾
Option: signal transfer unit		Yes	No
Option: rail track		Available in 1 meter lengths up to 15 meter in total.	

1) Cannot be combined with the signal transfer unit

SPB-2000, -7000

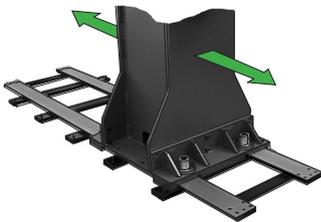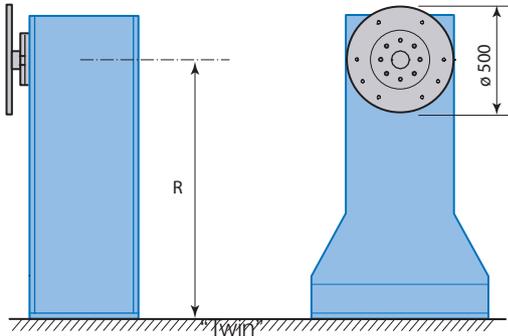

SPB tailstock on a rail track

YASKAWA



YASKAWA Nordic AB
 PO Box 504
 SE-385 25 Torsås, SWEDEN

Phone +46 480 41 78 00
 info.se@yaskawa.eu.com
 www.yaskawa.eu.com